

Public Address (PA) System 60W Mixer Amplifier FA-60/FA-120/FA-240/FA-350/FA-500



Description:

The Public Address (PA) Mixer Amplifier is suitable for school, super market, bank, hotel BGM and speech use.

It integrates pre amplifier and mixer power amplifier into one 19" 2U height unit of tabletop design, which is economy but of high reliable performance.

The tabletop mixer amplifier rated power out at 60W-500w. Its speaker outputs with 100V, 70V and 4 - 16ohms for versatile connections.

It integrates three microphone and two line inputs. Mic1 VOX with priority. Microphone1 on front panel by phone jack, microphone2 - 3 on rear panel by phone jack, line 1 - 2 on rear panel by RCA inputs. Microphone1 - 3 & Line1 - 2 inputs volume control on front panel with bass and treble tone control.


The amplifier is design with complete protection of overload, short circuit and high temp to avoid any damage.

Features:

- Public address (PA) tabletop mixer power amplifier.
- Commercial & industrial range BGM & paging amplifier.
- Rated outputs of 60W/120W/240W/350W/500W
- 70V, 100V and low impedance 4-16 ohms speaker outputs.
- 3 microphone inputs and 2 line inputs.
- Mic1 on front panel by phone jack, mic2-3 on rear panel by phone jack.
- Line 1-2 inputs on rear panel by RCA.
- Microphone1 of VOX features of highest input priority.
- Microphone1-3 & Line1-2 inputs volume control on front panel with bass and treble tone control.
- Power and output level meters.
- Overload, short circuit and high temp protection.
- With natural cooling fan to control the internal temperature.
- Warranty of 5 years with CE certificate.

Public Address (PA) System 60W Mixer Amplifier FA-60/FA-120/FA-240/FA-350/FA-500

Rear Panel:

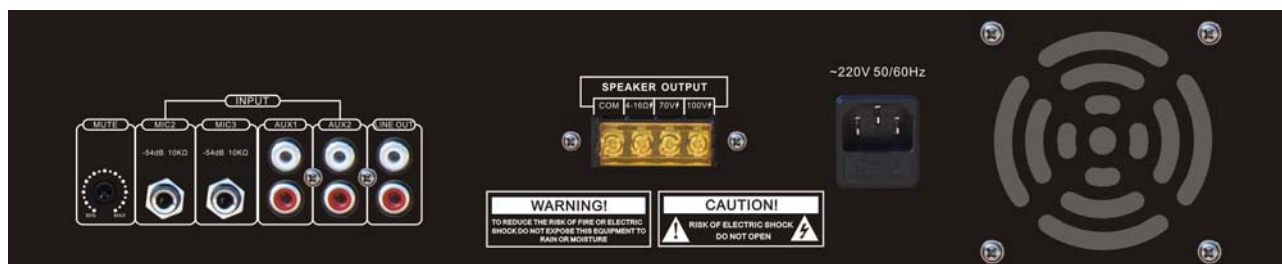

Specification:

Model	FA-60	FA-120	FA-240	FA-350	FA-500
Description	Public Address System 60W Mixer Amplifier				
Rated Power Output	60W	120w	240w	350w	500
Speaker Output	70V, 100V and 4-16Ω				
Input	Mic1-3: 600 ohms(Ω) 5-8 mV, unbalanced, Line1-2: 10k ohms(Ω) 150-470 mV, unbalanced				
Frequency Response	50-20000Hz +-3dB				
THD	<0.1% at 1kHz, 1/3 rated power				
S/N Ratio	Line: 70 dB , MIC: 65 dB				
Protection	High temp, short circuit, overload protection				
Power Supply	AC230V or AC110V, 50-60Hz				
Power Consumption	95W	175W	350W	485W	650W
Dimension	484(W)×366(D)×88(H)mm				
Packaging:	520(W)×435(D)×185(H)mm				
Net. Weight	10.1kg	11.4kg	13.7kg	14.1kg	16.5kg
Gross Weight	11.8kg	13.1kg	15.4kg	15.8kg	17kg
Warranty	5 years				